

## LFV Series

### Low Flow Valve

#### Low Flow DV Valve

The only valves in the industry made specifically for drip irrigation systems, the unique patented design of the LFV allows it to effectively handle particles at low flow rates. These valves contain all of the features of reliable Rain Bird DV valves, coupled with a unique diaphragm design that allows particles to pass through at extremely low flow rates, preventing weeping of the valve.

#### Features

- 1/2" diameter seat allows diaphragm to lift higher and pass larger particles at low flows
- Patent-pending double knife diaphragm design eliminates need for filtration at low flow rates
- Low flow valve allows the filter to be safely placed downstream of the valve
- Double-filtered pilot-flow design for maximum reliability
- Balanced-pressure diaphragm for long life
- External bleed to manually flush system of dirt and debris during installation and system start up
- Internal bleed for spray-free manual operation
- Energy efficient, low-power encapsulated solenoid with captured plunger and 90-mesh (200 micron) solenoid filter
- Buna-N diaphragm with self-cleaning 90-mesh (200 micron) pilot water filter and captive spring
- Operates in low-flow and Xerigation® applications
- 1 1/4" (3,2 cm) stainless steel phillips head screws
- Accepts latching solenoid for use with Rain Bird battery-operated controllers

- Available as: 3/4" (20/27) and 1" (26/34) FPT 1" (26/34) BSP inline configuration
- Standard in XCZLF-100-PRF and XCZ-075-PRF

#### Operating Range

- Pressure: 15 to 150 psi (1,0 to 10,4 bar)
- LfV075 Flow: 0.2 to 8 gpm (0,05 to 1,82 m<sup>3</sup>/h; 0,01 to 0,50 l/s)
- LfV100 and ILfV100 Flow: 0.2 to 10 gpm (0,05 to 1,82 m<sup>3</sup>/h; 0,01 to 0,50 l/s)
- Water Temperature: Up to 110° F (43° C)
- Ambient air temperature up to 125° F (52° C)

#### Electrical Specifications

- 24 VAC 50/60 Hz (cycles per second) solenoid power requirement
- 0.30 A (7.2 VA) inrush current
- 0.19 A (4.56 VA) holding current
- Solenoid coil resistance: 38 Ohms

#### Dimensions

- Height: 4 1/2" (11,4 cm)
- Length: 4 3/8" (11,1 cm)
- Width: 3 1/3" (8,4 cm)

#### Models

- LfV075: 3/4" Low Flow Valve
- LfV100: 1" Low Flow Valve
- ILfV100: 1" Low Flow Valve with 1" BSP threads



#### How To Specify

**LFV** - **100**

Size  
075: 3/4" (20/27)  
100: 1" (26/34)

#### Model

Low Flow Remote Control Diaphragm Valve

**Note:** For non-U.S. applications it is necessary to specify ILfV-100 BSP thread type (1" only)

## Specifications

### LFV075 and LFV100 Electric Remote Control Valves


The valve shall be normally closed 24 VAC 50/60 Hz (cycles per second) solenoid actuated, balanced pressure type capable of a flow rate of \_\_\_\_\_ gpm (l/s; m<sup>3</sup>/h) with a pressure loss not to exceed \_\_\_\_\_ psi (bar). The valve pressure rating shall not be less than 150 psi (10,4 bar). The valve body and bonnet shall be constructed of high impact weather resistant plastic, stainless steel and other chemical/UV resistant materials. The valve shall have a one unit diaphragm constructed of durable Buna-N rubber material with a clog resistant metering orifice, and a double knife seal. The valve shall have a 1/2" diameter seat. The valve shall have one 90-mesh (200 micron) pilot filter attached to the diaphragm. The valve shall have one fully encapsulated solenoid with captured plunger. The valve shall have one 90-mesh (200 micron) pilot filter attached to the diaphragm. The valve shall have one fully encapsulated solenoid with captured plunger. The valve shall have one 90-mesh (200 micron) filter attached to the solenoid base.

The valve body shall have one of the following: a 3/4" globe configuration (20/27) or 1" (26/34) (FNPT) inlet and outlet.

The valve shall be actuated by a low power 0.30 A (7.2 VA) in-rush current and 0.19 A (4.56 VA) holding current. The valve shall be capable of on/off control by turning the solenoid 1/4 turn. The valve shall provide a flush mode that is manually activated by 1/2 turn of the bleed screw where external porting is permissible.

The valve shall be as such to provide for all internal parts to be removable from the top of the valve without disturbing the valve installation.

The remote control valve is manufactured by Rain Bird Corporation.

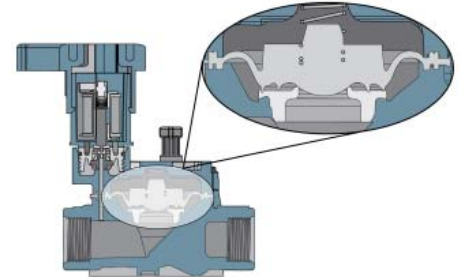

### Low Flow Valve

#### Pressure Loss Characteristics

				METRIC			
Flow GPM	Flow GPH	LFV-075 (psi)	LFV-100 (psi)	Flow l/hr	Flow l/s	LFV-075 (bars)	LFV-100 (bars)
0.2	12	3.0	3.0	45,42	0,01	0,21	0,21
1.0	60	3.2	3.4	227	0,06	0,22	0,23
2.0	120	3.3	3.8	454	0,13	0,23	0,26
4.0	240	3.6	5.0	908	0,25	0,25	0,34
6.0	360	4.2	6.4	1362	0,38	0,28	0,44
8.0	480	6.8	7.5	1817	0,50	0,47	0,52

#### Rain Bird Corporation

6991 E. Southpoint Road  
Tucson, AZ 85756  
Phone: (520) 741-6100  
Fax: (520) 741-6522

#### Rain Bird Technical Services

(800) RAINBIRD (1-800-724-6247)  
(U.S. and Canada)

#### Rain Bird Corporation

970 West Sierra Madre Avenue  
Azusa, CA 91702  
Phone: (626) 812-3400  
Fax: (626) 812-3411

#### Specification Hotline

800-458-3005 (U.S. and Canada)

#### Rain Bird International, Inc.

1000 West Sierra Madre Ave.  
Azusa, CA 91702  
Phone: (626) 963-9311  
Fax: (626) 852-7343

The Intelligent Use of Water™

[www.rainbird.com](http://www.rainbird.com)